




Industrial Monitors



Unique Features of Protek Industrial Monitors


- 1 Powder coating gives a tough corrosion resistant finish
- 2 Positive friction locks on both horizontal and vertical
- 3 Stainless steel lever
- 4 Major component made from bronze alloy (UNS C83600, ASTM B62) for a long in serving life
- 5 Able to be supplied with extensive flange options: ANSI, ASA, DIN or ISO.
- 6 A double row of stainless steel ball bearing in monitor joints ensure easy movement even when monitor is under pressure
- 7 A comprehensive range of water and self-educing foam master stream nozzles available to fit for any application
- 8 Grease fittings for easy lubrication

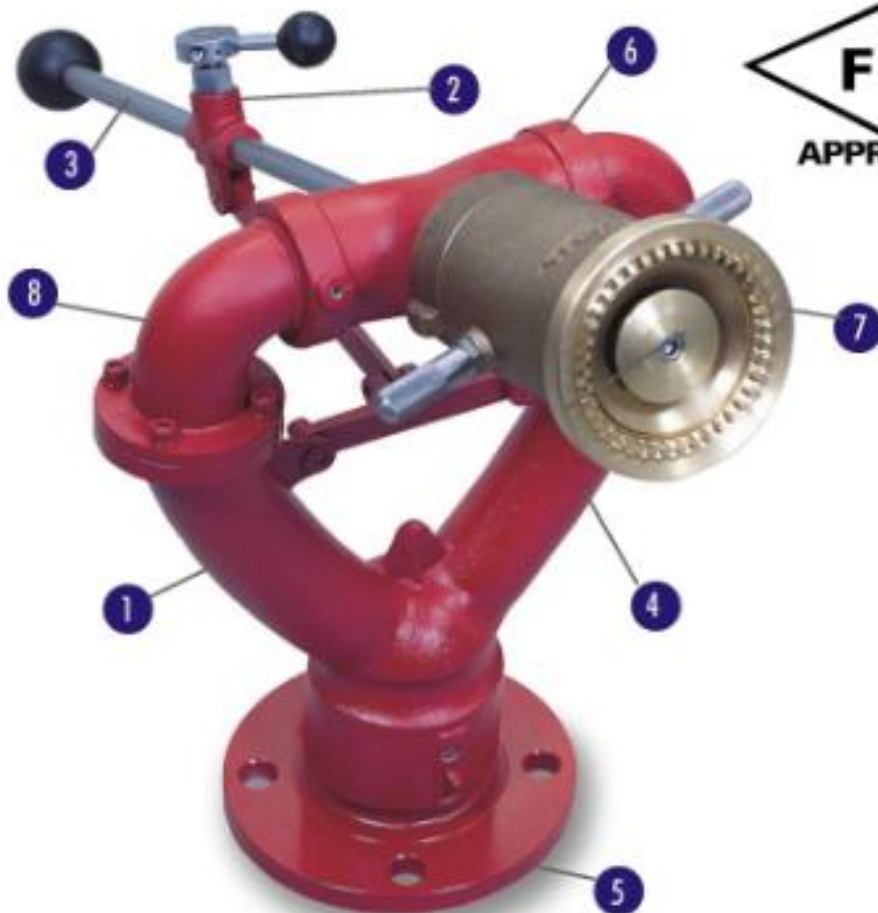



Style #636 Monitor

- Corrosion resistant bronze construction ideal for marine, offshore, industrial or corrosive environment
- Full 2-1/2" waterway
- Flow Up to 750 GPM (2,840 LPM)
- Full 360 degrees rotation
- Vertical travel of 135 degrees from 75 degrees above to 60 degrees below horizontal
- Positive friction locks on both horizontal and vertical travel to hold the desired position
- Stainless steel lever
- Operating pressure of 200 PSI (14 bar)
- Standard unit painted red

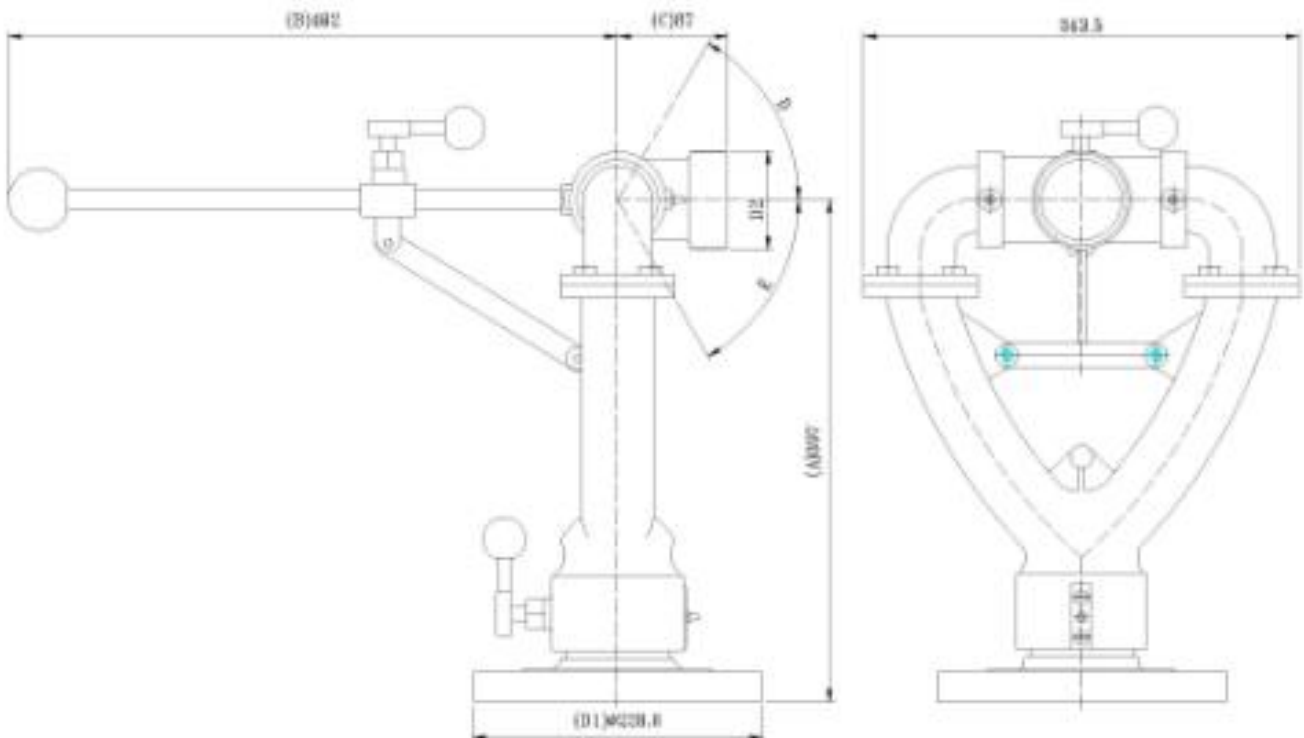

STYLE	HEIGHT	WIDTH	INLET	OUTLET	WEIGHT LBS	FLOW
						GPM
636	18"	14"	3" or 4" FL	2.5"	46	750