

EMERGENCY LIGHT LED


HOUSING

- * DIE-FORM HIGH GRADE STEEL SHEET
- * FIVE-STAGES ZINC-PHOSPHATE PRE-TREATMENT FOR RUST RESISTANT , FINISHED WITH WHITE POLYESTER POWDER BY ELECTROSTATIC METHOD TWO STAGES AND BAKED ENAMEL
- * DIE-CAST ALUMINIUM HEAD BULB AND BLACK ANTI-DUST RUBBER



BATTERY

- * RECHARGABLE SEALED LEAD ACID WITH MAINTENANCE FREE
- * SOLID-STATE CONTROL AUTOMATIC BATTERY CHARGER , WITH CONSTANT VOLTAGE (LIMIT CURRENT)

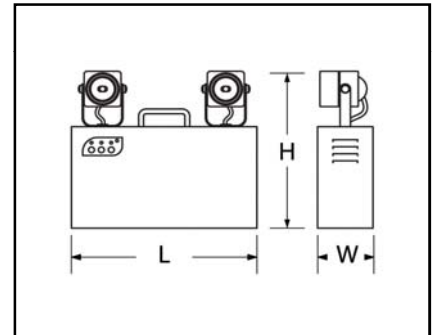

PROTECTION

- * LOW-HIGH BATTERY CUT-OFF , LOW-HIGH BATTERY CHARGER CUT-OFF , OVER-UNDER VOLTAGE CUT-OFF , AC FUSE , DC FUSE

STANDARD

- * TIS. 1102-2538 APPROVAL WITH CLASS I AND F MARK CONFORMING TO IEC 60598-2-22
- * TIS. 1955-2542
- * ISO 9001 CERTIFIED

FRONT PANEL

- * L.E.D. AC POWER
- * L.E.D. CHARGE
- * L.E.D. FULL CHARGE
- * ON/OFF SOFT SWITCH BUTTON
- * TEST SOFT SWITCH BUTTON

WARRANTY

- * BATTERY WARRANTY 2 YEARS

INSTALLATION

- * SURFACE WALL MOUNTED

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLEM-238L10	2x3.8W	LED	80	360	262	BATTERY 12V 7AH, DURATION 10 Hrs.