EXIT SIGN LIGHTING

Standard LED Series

Slimline Type



EXB 303 SRE / TRE-ED Recess Mount



EXB 303 SCE / TCE- ED Ceiling Mount

Wall Box Type

EXB 111-LED

EXB 112-LED



Specification

Mode of Operation	: Maintained
Main Supply	: AC 220 Volt, 50 Hz, ±10% - Single Phase
Lamp	: SMD-Surface Mount - Cool White
Construction	: Electro-Galvanized steel sheet with epoxy powder and stove enamel coated anti-rust corrosion proof
Battery	: **Nickle Metal Hydride Battery, High Temperature type**
Charger	: Solid state system automatic battery charger
Charging Period	: 10-12 Hours as required
	: Constant current charger
Safety Features	: Low - High voltage cut-off, preventing battery over discharge and recharge
	: AC fuse - preventing short circuit and overload for main incoming AC
	: DC fuse - preventing short circuit and overload for charging
Legend	: ISO Green, other legend optional are available
Mounting	: Wall mounted or Ceiling mounted
Accessories	: Infrared remote test

Install type

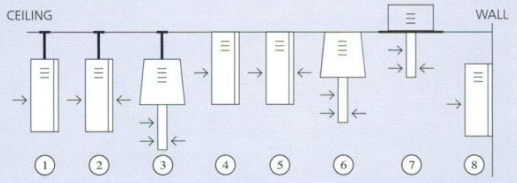

Box-Type

MODEL	SIDE	BATTERY	LAMP (Watt)	LUMINOUS INTENSITY (mcd)	DURATION (Hrs.)	WEIGHT (Kgs.)	DIMENSION L x W x H (cm)
EXB 111-LED	1	NI-MH	LED STRIPE	8000	3	1.0	35 x 4 x 16.2
EXB 112-LED	2	3.6V 2100MAh.	1 x 10 w		3	0.90	35 x 4.2 x 16.2
EXB 221-LED	1	SLA	LED STRIPE		2	5.20	70 x 9.5 x 22.5
EXB 222-LED	2	12V 3.2Ah.	2 x 15 w		2	4.85	70 x 10 x 22.5
EXB 421-LED	1	SLA	LED STRIPE		3	13.65	130 x 12 x 30
EXB 422-LED	2	12V 7.0Ah.	4 x 15 w		3	11.70	130 x 12 x 30

Slimline - Recess Mount

MODEL	SIDE	BATTERY	LAMP (Watt)	LUMINOUS INTENSITY (mcd)	DURATION (Hrs.)	WEIGHT (Kgs.)	DIMENSION L x W x H (cm)
EXB 303 SRE - ED	1	NI-MH	LED STRIPE	8000	3	2.05	39 x 7 x 4.5
EXB 303 TRE - ED	2	3.6V 2100MAh.	1 x 10 w		3	2.05	39 x 7 x 4.5

Slimline - Ceiling Mount

MODEL	SIDE	BATTERY	LAMP (Watt)	LUMINOUS INTENSITY (mcd)	DURATION (Hrs.)	WEIGHT (Kgs.)	DIMENSION L x W x H (cm)
EXB 303 SCE - ED	1	NI-MH	LED STRIPE	8000	3	1.95	37.5 x 4.5 x 6.5
EXB 303 TCE - ED	2	3.6V 2100MAh.	1 x 10 w		3	1.95	37.5 x 4.5 x 6.5